



Sealant Technologies

For Fluid Sealing and Transport



GORE TECHNOLOGY

SOLVING THE MOST CHALLENGING SEALING PROBLEMS.



For nearly 40 years, Gore's Sealant Technologies Group has developed innovative PTFE gaskets, seals and other fluid-sealing products designed to meet both standard and unique sealing and pumping applications.



Fluid Sealing Leadership

For nearly 40 years, the Sealant Technologies Group of W. L. Gore & Associates has fostered a solid knowledge of factors that influence the sealing of piping systems, vessels, pumps and valves. Our singular focus has resulted in the development of innovative and top-performing gaskets and packings. We've also established a comprehensive technical services program, specially designed to help customers determine the best solutions for their toughest sealing applications.


Products that Seal

Because of its unique combination of properties, GORE® expanded PTFE virtually eliminates the drawbacks of conventional PTFE sealing and fluid handling products. Our gasket configurations provide solutions for flanges that are fragile, warped or misaligned. We also enable users to standardize one gasket material across a wide range of process piping systems. Our packings are among the highest-performing, most universal products on the market today.

Global Company ... Global Commitment

We're a creative technology company employing more than 9,000 associates, in more than 30 countries around the world. Working in a distinctive company culture that encourages innovation, commitment and communication, Gore engineers have created thousands of patented and proprietary inventions. Each product is designed to be the best-performing, highest-quality product solution in its class.

APPLICATIONS

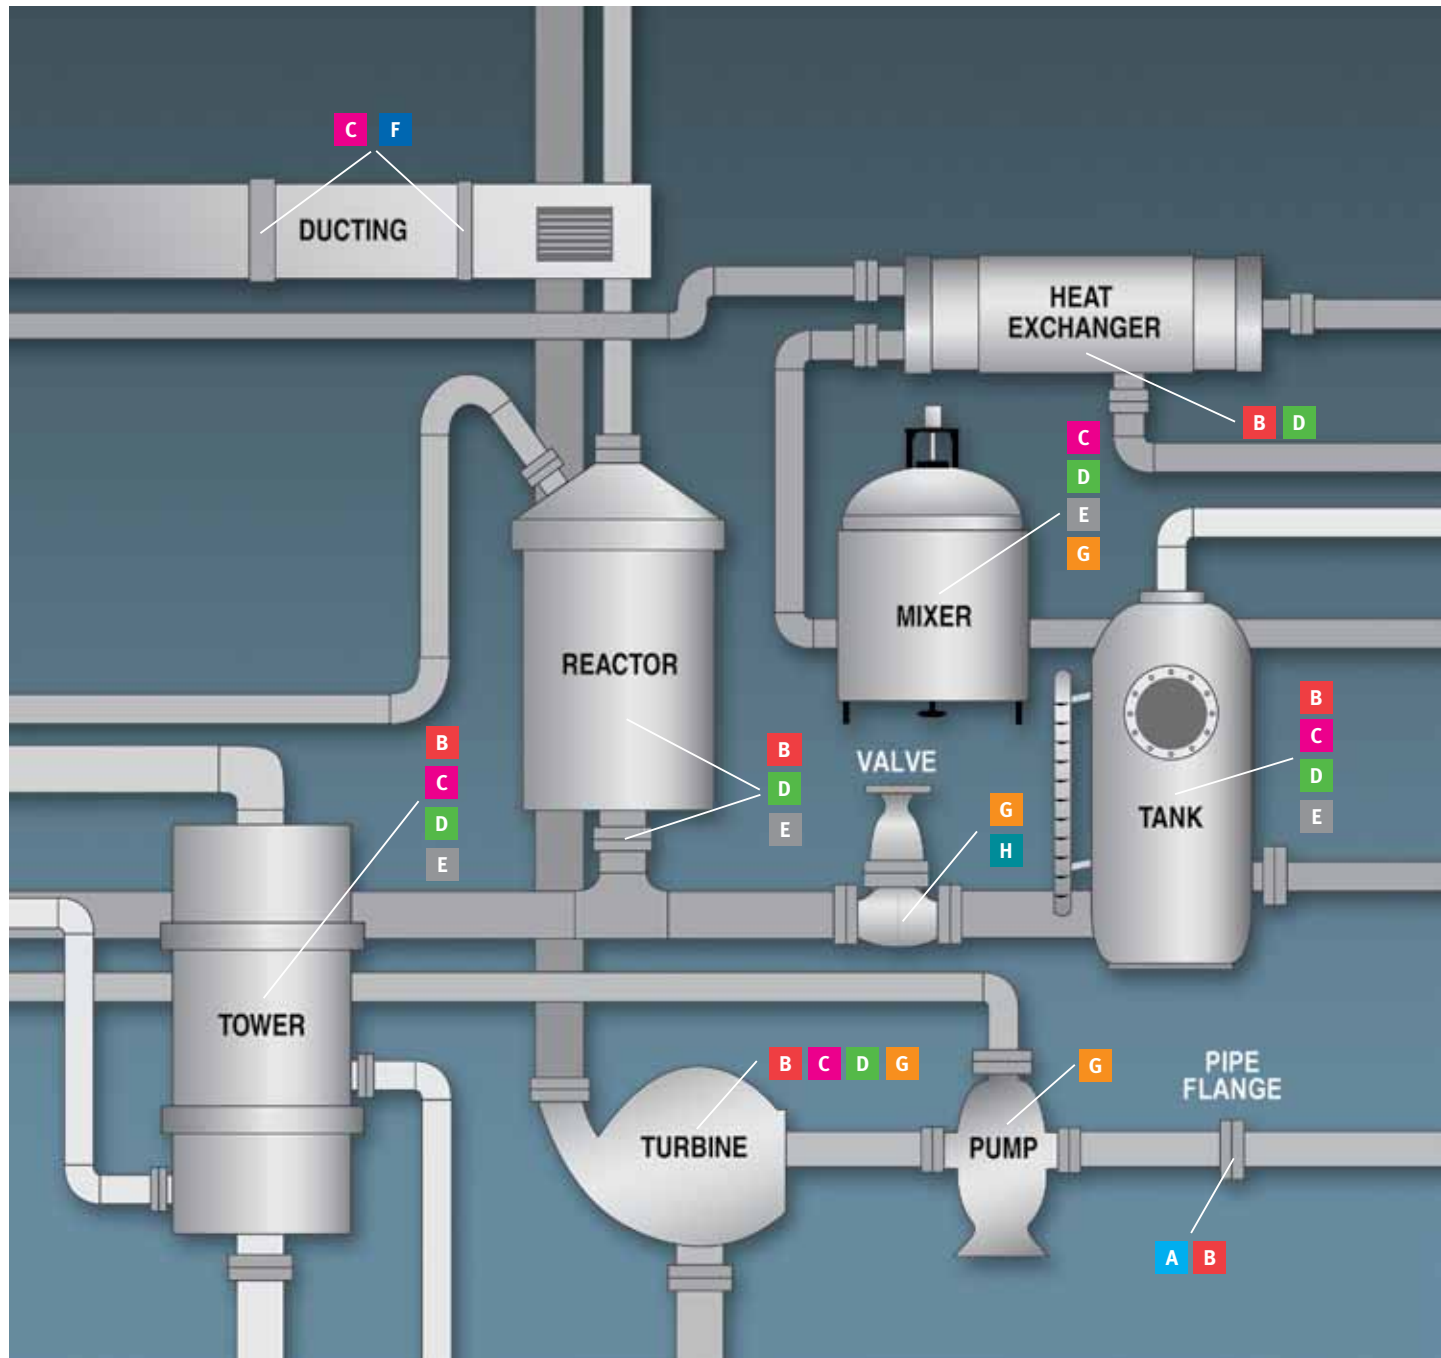


KEY

- | | | | |
|----------|--------------------------------------|----------|-------------------------------------|
| A | GORE® Universal Pipe Gasket | E | GORE® Series 600 Gasket Tape |
| B | GORE® GR Sheet Gasketing | F | GORE® Gasket Tape* |
| C | GORE® Joint Sealant* | G | GORE® GFO® Packing* |
| D | GORE® Series 500 Gasket Tape* | H | GORE® Valve Stem Packing* |

*** FOR INDUSTRIAL USE ONLY.**
 Not for use in food, drug, cosmetic
 or medical device manufacturing,
 processing, or packaging operations.

GORE[®] GASKETING

Whether it's a standard piping or vessel application, or a difficult and unusual sealing problem, chances are one of Gore's gasketing products can provide a highly effective solution.



Reliable Seal

Gore sealants are among the world's tightest, most reliable and chemically resistant gaskets. They withstand temperatures from -450°F to +600°F (-268°C to +315°C), making them ideal for high-temperature as well as cryogenic applications. And they are resistant to the most challenging chemicals.

Our gaskets are proven effective against every performance measure. They seal at low bolt loads, conform to flange deviations, exhibit high dimensional stability, resist creep and cold flow, and are highly resistant to blowout.

Gore gaskets are designed to meet the many needs of process piping materials, making them ideal for lowering total sealing system costs. They solve special sealing problems, and provide the ability to standardize with one gasket material across steel, glass-lined and fiber-reinforced plastic (FRP) systems wherever non-metallic gaskets are used.



GORE® UNIVERSAL PIPE GASKET (STYLE 800)

A



A universal gasket for all standard flanges on chemical process piping. Designed to meet the needs of different piping materials, it is ideal for standardizing across steel, glass-lined steel, and fiber-reinforced plastic (FRP) systems. It delivers long-life performance, lowers total system sealing costs and simplifies inventory stocking requirements, while also protecting against the use of the wrong gasket.

GORE® SERIES 500 GASKET TAPE*

D



Save time, money, and trouble with this cutting-edge form-in-place product that maximizes operational reliability of large steel pipe and equipment flanges. Delivering dramatically improved creep resistance, the highly compressible tape forms a very tight seal that is long-lasting while also handling the rigors of virtually any chemical process. Unlike traditional large gaskets, this tape fits any shape instantly which eliminates large gasket fabrication and inventory challenges.

GORE® GR SHEET GASKETING

B



Unmatched in sealing reliability, this unique product is ideal for sealing steel pipe and equipment flanges across a range of aggressive fluids. Gain the benefits of PTFE gasketing without the problems of creep and cold flow – along with a level of high-temperature and blowout resistance that is superior to any other PTFE sheet gasket. Highly conformable, it compresses into an extremely tough gasket that seals tight, even on irregular flanges.

GORE® SERIES 600 GASKET TAPE

E



A form-in-place gasket for glass-lined equipment that guards against premature gasket failure. Unlike PTFE envelope gaskets, it won't degrade due to chemical attack, ensuring a tight, long-lasting seal. Made from 100% multi-directionally expanded PTFE, the entire gasket is chemically inert. It conforms to common glass-lined flange imperfections, yet maintains dimensional stability. Plus, installation is quick, easy and at lower cost.

GORE® JOINT SEALANT*

C



The original form-in-place gasketing, it's the most versatile and cost-effective alternative to sheet gasketing for large equipment flanges. Ideal for sealing complex surfaces, it conforms extremely well to rough or pitted surfaces. It's easy to install, too: just peel off the backing, apply to the surface, and overlap the ends for a remarkably tight seal.

GORE® GASKET TAPE*

F



This versatile, thin-profile, form-in-place gasketing features a full-face strip-type construction under 2 inches (50.8 mm) wide for smooth, flat, rectangular sealing surfaces or for narrow sealing surfaces. It compresses easily to an extremely thin profile, while requiring only minimal compression to seal. Because of its easy installation and removal, it is ideal for equipment with tight tolerances.

* FOR INDUSTRIAL USE ONLY.


Not for use in food, drug, cosmetic or medical device manufacturing, processing, or packaging operations.



GASKETING PRODUCT SELECTION GUIDE


STEP 1:

Verify that the Application meets GORE® Gasketing Qualifications

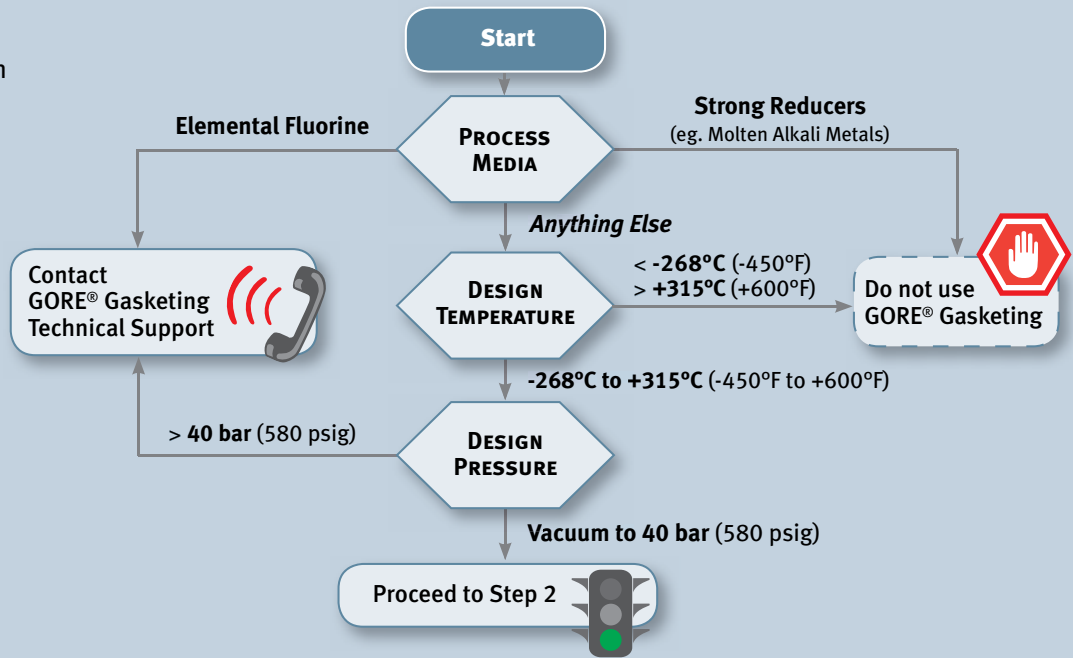

STEP 2:

Narrow the selection of GORE® Gasketing Products for the Application

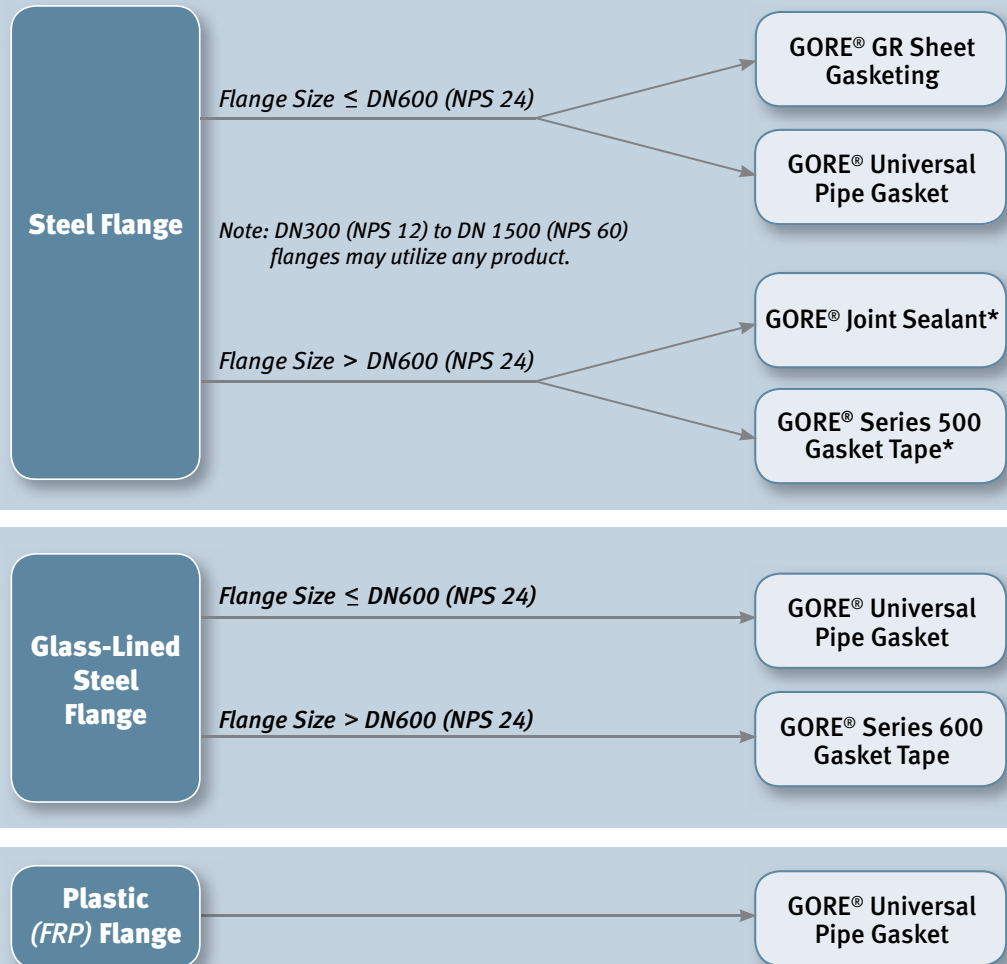

► For other flange materials, please contact your Gore representative.

GORE® PACKING

GORE® GFO® PACKING*

G



Pack It and Forget It.™

Proven High Performance

Packings containing 100% GORE® GFO® fiber give maintenance engineers consistently high-performing general service packing for wide application and use. Unlike other PTFE/graphite packings, only those made with GFO® fiber, with its 30-year history of trouble-free performance, deliver an unmatched level of assurance and confidence.

Because of its high durability and long life, GORE® GFO® packing is consistently high performing. Its applications include sealing shafts on high-speed pumps, mixers, agitators, or any other equipment with rotating or reciprocating shafts.

GORE® GFO® packing doesn't get hard or brittle, thereby minimizing shaft wear. Moreover, its excellent lubricity and high



thermal conductivity keep it cool-running even after extended periods of continuous operation at shaft speeds to 4,300 fpm (21.8 m/s). Easy to install and remove, this packing is temperature and chemically tolerant over a wide range of conditions.

The Only Seal of Assurance Program for Packing Fibers

Many PTFE/Graphite packings are available in the market. They all look the same but often have inconsistent and/or inferior product quality. The installation of these products can lead to premature packing failure and unscheduled shut-downs. Such problems can cost a lot of time and money.

To overcome these challenges, Gore's Seal of Assurance Program ensures that every fiber used to braid the packing is a GORE® GFO® Fiber. We even perform an after-market

audit to confirm it. Look for 100% GFO® printed right on the packing – it's the only packing that is identified this way!

That is your genuine reassurance that your packing works and performs...and will keep working and performing.



GORE® VALVE STEM PACKING*

H



A pliable, self-lubricating packing that eliminates stem wear and lasts longer. This continuous-length packing is easy to install and forms a cohesive cylinder when compressed, eliminating the need to cut and form rings.

* FOR INDUSTRIAL USE ONLY.
Not for use in food, drug, cosmetic or medical device manufacturing, processing, or packaging operations.



Sealant Technologies

www.gore.com/sealants

Visit our web site for more information on sealant technologies. You'll find important information on Gore's sealing products, technical specifications, recommended applications and usage guidelines. You may also contact our technical support team about your specific sealing challenges, or to locate a Gore authorized distributor in your area.

Argentina

W. L. GORE & ASSOCIATES (ARG.) S.R.L.
Salta 331
C. P. 5000 Córdoba
Argentina
Tel.: +54 351 4217279
Fax: +54 351 4217281
sellados@wlgore.com

Australia

W. L. GORE & ASSOCIATES PTY LTD.
13 Narabang Way
Belrose, NSW 2085
Tel.: +61/2-9473-6800
Fax: +61/2-9450-1246
sealants_AP@wlgore.com

Brazil

W. L. GORE & ASSOCIATES DO BRASIL LTDA
Edifício Bolsa de Imóveis de São Paulo
Av. das Nações Unidas, 11.541 - CJ52
Brooklin Paulista
São Paulo - SP
Tel.: + (55 11) 5502-7800
Fax: + (55 11) 5502-7801
vedacoes@wlgore.com

China

GORE INDUSTRIAL PRODUCTS TRADE Co., LTD.
Room 43F, United Plaza
1468 Nanjing Road West
Shanghai 200040
Tel.: + (8621) 5172 8299
Fax: + (8621) 6247 9199
sealants_AP@wlgore.com

France

W. L. GORE & ASSOCIÉS
Bercy International
20, Place des Vins De France
75603 Paris Cédex 12, France
Tel.: +33 1 56 95 65 65
Fax: +33 1 56 65 64 02
IPDFrance@wlgore.com

Germany

W. L. GORE & ASSOCIATES GmbH
Wernher-Von Braun-Strasse 18
D-85640 Putzbrunn
Tel.: +49 89 4612-2215
Fax: +49 89 4612-43780
sealants_EU@wlgore.com

Hong Kong

W. L. GORE & ASSOCIATES (HK) LTD.
12/F, Tower 2, Grand Century Place
193 Prince Edward Road West
Mongkok, Kowloon
Hong Kong
Tel.: (852) 2622 9622
Fax: (852) 2622 9898

India

W. L. GORE & ASSOCIATES (PACIFIC) PTE LTD.
802, A-Wing
215 ATRIUM
Andheri- Kurla Road
Chakala, Andheri (East)
Mumbai - 400 059
Tel.: 91-22-67687000
Fax: 91-22-66919228

Italy

W. L. GORE & ASSOCIATI, S.R.L.
Via Enrico Fermi, 2/4
37135 Verona - VR
Tel.: +39 (045) 6 20 92 50
Fax: +39 (045) 6 20 91 65
ItalySealant@wlgore.com

Japan

NIHON GORE KABUSHIKI KAISHA (BUSINESS OPERATIONS CENTER)
14F, W Building 1-8-15 Konan
Minato-ku, Tokyo
108-0075 JAPAN
Tel.: +81 3 6746 2600
Fax: +81 3 6746 2615

Korea

W. L. GORE & ASSOCIATES, (KOREA) LTD.
12F Chong Kun Dang Building
368, Chungjungro-3KA
Sudaemoon-Ku
Seoul 120-756 Korea
Phone: 82/2 393-3411
Fax: 82/2 393-1285
sealants_AP@wlgore.com

Netherlands

W. L. GORE & ASSOCIATES B.V.
Ringbaan Oost 152-A
5013 CE Tilburg
Tel.: +31 (0) 13 507 47 00
Fax: +31 (0) 13 543 87 36
sealants_EU@wlgore.com

Poland

W. L. GORE & ASSOCIATES POLSKA Sp. z o. o.
ul. Migdalowa 4
PL-02-796 Warszawa
Tel.: +48 (22) 6 45 15 37
Fax: +48 (22) 6 45 15 40
ipd-poland@wlgore.com

Scandinavia

W. L. GORE & ASSOCIATES Scandinavia AB
Box 268
Visiting address: Neogatan 9
43123 Mölndal, Sweden
Tel.: +46 (0) 31 706 78 00
Fax: +46 (0) 31 86 42 26
ipd_scandinavia@wlgore.com

Singapore

W. L. GORE & ASSOCIATES (PACIFIC) PTE, LTD.
83, Clemenceau Ave.
#17-01 UE Square
Singapore 239920
Tel.: +65 6733 2882
Fax: +65 6836 8228
sealants_AP@wlgore.com

South Africa

W. L. GORE & ASSOCIATES (SA)(PTY) LTD.
P.O. Box 3978, Kempton Park 1620
Tel.: +11 27 11 894 2248
Fax: +11 27 11 894 2296
sealants_EU@wlgore.com

Spain

W. L. GORE Y ASOCIADOS, S.L.
Vallespir, 24, 2
Polígono Fontsaeta
08970 Sant Joan Despí-Barcelona
Tel.: +34 (93) 4 80 69 00
Fax: +34 (93) 3 73 78 50
ipdspain@wlgore.com

United Arab Emirates

W. L. GORE & ASSOCIATES GMBH MIDDLE EAST - ABU DHABI
P.O. Box 11 44 70
Al Niyadi Bldg, 9th floor, office 903
Airport Road
Abu Dhabi
Tel.: +971 2 4437749
Fax: +971 2 4437748
sealants_EU@wlgore.com

United Kingdom

W. L. GORE & ASSOCIATES (UK)
Kirkton South Road
Kirkton Campus
Livingston, West Lothian EH54 7BT
Tel.: +44 1506 46 01 23
Fax: +44 1506 46 22 70
sealants_EU@wlgore.com

GFO, GORE and designs are trademarks of W. L. Gore & Associates ©2012 W. L. Gore & Associates, Inc.

W. L. GORE & ASSOCIATES, INC.

201 Airport Road, P. O. Box 1488
Elkton, MD 21922-1488, USA
Tel: +1 410-392-3200 • Fax: +1 410-392-4817
E-mail: sealants@wlgore.com

gore.com/sealants

All technical information and advice given here is based on our previous experiences and/or test results. We give this information to the best of our knowledge, but assume no legal responsibility. Customers are asked to check the suitability and usability in the specific application, since the performance of the product can only be judged when all necessary operating data are available. Specifications are subject to change without notice. Gore's terms and conditions of sale apply to the purchase and sale of the product.

